

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 125 595 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
22.08.2001 Bulletin 2001/34

(51) Int Cl.7: A61M 16/04, A61M 16/06,  
B29C 41/04

(21) Application number: 01300720.8

(22) Date of filing: 26.01.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Doane, Mark William  
North Fort Myers, Florida 33917 (US)  
• Thomas, Jim  
New Orleans, Louisiana 70183 (US)

(30) Priority: 08.02.2000 GB 0002805


(74) Representative: Flint, Jonathan McNeill et al  
765 Finchley Road  
London NW11 8DS (GB)

(71) Applicant: Smiths Group PLC  
London NW11 8DS (GB)

### (54) Masks and their manufacture

(57) A mask 2, 50 such as a laryngeal mask or face mask, has a soft annular cuff 21, 52 on a more rigid mount 20, 51 of funnel shape. The cuff 21 and mount

20 are moulded together by rotational moulding or the mount 51 is preformed and the cuff 52 is moulded onto the mount in a rotational mould 60.

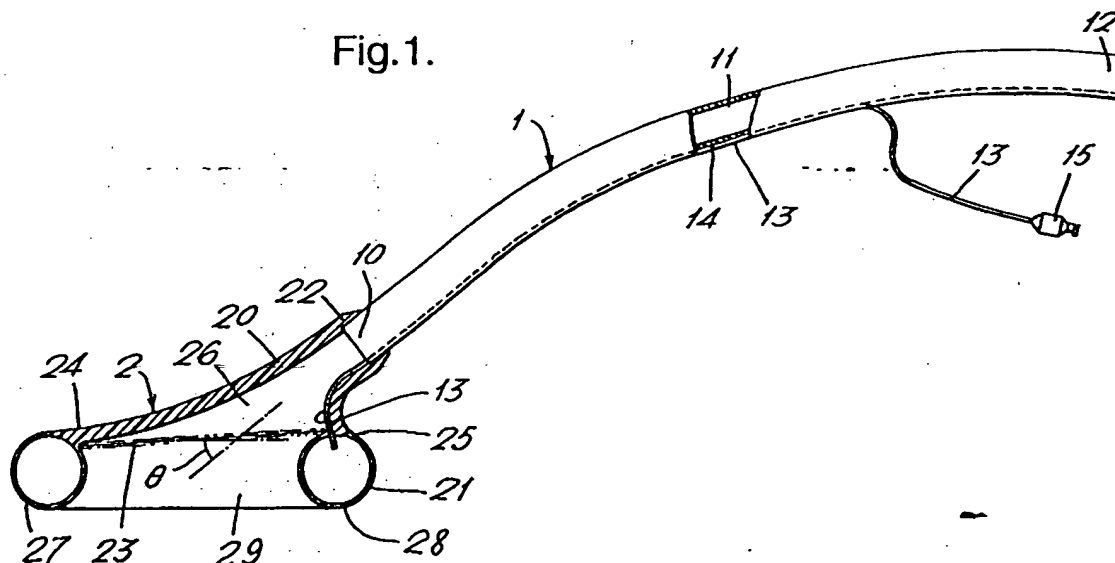

## Description

[0001] This invention relates to masks of the kind comprising a soft cuff member of substantially annular shape and a more rigid mount member of generally funnel shape.

[0002] Masks, such as face masks or laryngeal masks, comprise a relatively stiff mount, cone or shoe member and a softer, more flexible annular balloon, cuff or cushion extending around the edge of the mount, which conforms readily to the anatomy and makes sealing contact with the patient tissue. The cuff is formed separately from the mount and is subsequently joined with it, such as by means of an adhesive or solvent. The cuff may be made by an injection moulding or rotational moulding technique; the mount is usually made by an injection moulding technique. Examples of laryngeal masks and their manufacture are shown in US 5355879, US 5305743, US 5297547, US 5282464, GB 2267034, US 5249571, US 5241956, US 5303697, GB 2249959, GB 2111394, EP 448878, US 4995388, GB 2205499, GB 2128561, GB 2298797, GB 2334215, PCT/GB00/03045, PCT/GB00/03044 and GB 2337020.

[0003] Masks made in this way are relatively expensive because of the need for different manufacturing and assembly operations. The join between the mount and cushion provides a possible site for failure or leakage and requires testing to ensure an effective join. Where the mask is used internally, such as in a laryngeal mask, the consequences of separation of the cushion and mount can be severe. The join itself may make the mask stiffer or may make it more difficult to achieve exactly the desired flexibility.

[0004] It is an object of the present invention to provide an alternative mask and method of manufacture.

[0005] According to one aspect of the present invention there is provided a mask of the above-specified kind, characterised in that the cuff member is moulded with the mount member.

[0006] The cuff member is preferably formed by rotational moulding. The cuff member and mount member may be moulded integrally as a single piece or the mount may be pre-formed and the cuff member subsequently moulded with the mount member. The cuff member is preferably hollow. The mask may be a laryngeal mask, the cuff member being adapted to seal with tissue in the region of the hypopharynx. Alternatively, the mask may be a face mask, the cuff member being adapted to seal around the nose and mouth.

[0007] According to another aspect of the present invention, there is provided a method of making a mask comprising the steps of adding a fluid plastics material to a mould having a first region defining the shape of a cuff and a second region defining the shape of a mount, angularly displacing the mould so that the fluid plastics material coats the first region to form a thin layer of gelled plastics in the first region, angularly orienting the mould so that the fluid plastics material coats the second

region to form a thicker layer in the second region, and subsequently removing from the mould a mask with an integral cuff and mount member.

[0008] According to a third aspect of the present invention there is provided a method of making a mask comprising the steps of pre-forming a mount member, placing the mount member in a rotational mould and moulding a cuff member with the mount member by rotational moulding.

[0009] A laryngeal mask assembly and face mask assembly according to the present invention, will now be described, by way of example, with reference to the accompanying drawings, in which:

15 Figure 1 is a partly-sectional side elevation view of the laryngeal mask assembly;

Figure 2 is a schematic sectional side elevation view of moulding apparatus used to form the mask of the assembly of Figure 1 at a first stage in the moulding operation;

20 Figure 3 is a sectional side elevation view of the moulding apparatus of Figure 2 at a subsequent stage in the moulding operation;

25 Figure 4 is a sectional side elevation view of a face mask;

30 Figure 5 is a sectional, perspective view of the mould used to make the face mask of Figure 4; and

35 Figure 6 shows the underside of the cone of the face mask at a preliminary stage of manufacture.

[0010] With reference first to Figure 1, the laryngeal mask assembly comprises a tube 1 and a mask 2 mounted at the patient end 10 of the tube.

[0011] The tube 1 is of a bendable plastics material, such as PVC and is curved along its length. A bore 11 extends along the tube 1 from its patient end 10 to its rear, machine end 12. A small-bore inflation line 13 extends along the length of the tube 1, within a channel 14 formed along the outside of its wall, such as in the manner described in PCT/GB00/03044. Towards its machine end, the inflation line 13 extends away from the tube 1 and is connected to a combined valve and coupling 15 of the usual kind.

[0012] The mask 2 comprises a mount 20 and an inflatable cuff 21. The mount 20 is of a plastics material and is generally of a shoe or funnel shape. It has a relatively thick wall so that it is relatively stiff. The rear, machine end of the mount 20 has a neck 22 of circular section embracing and bonded to the patient end 10 of the tube 1. A silicone gasket (not shown) may be inserted between the tube 1 and the mount 20 to improve the

seal. The mount 20 tapers outwardly from the machine end 22 to its patient end 23, which is inclined to the axis of the machine end at an angle  $\theta$  of about  $25^\circ$  so that the patient end of the mount has an oval shape with its forward end 24 being more pointed than its rear end 25. The patient end 23 of the mount 20 is inclined to face towards the inner side of the curve of the tube 1. Internally, the machine end 22 of the mount 20 communicates with a cavity 26 in the mount that increases in cross-sectional area along its length, from the machine end.

[0013] The cuff 21 is formed integrally as a single piece with the mount 20 and is of the same plastics material but has a thinner wall so that it is softer and more flexible. The cuff 21 is formed into an annulus of the same shape as the patient end 23 of the mount 20 and is oval with its forwardly-directed end 27 being more pointed than its rearwardly-directed end 28. The cuff 21 encloses a central region 29 of the same shape as the patient end 23 of the mount 20. The inflation line 13 extends beyond the patient end 10 of the tube, is moulded into the mount 20 and projects into the cuff 21 so that the cuff can be inflated and deflated via the inflation line. When inflated in position in a patient, the cuff 21 expands to contact patient tissue in the region of the hypopharynx.

[0014] The cuff 21 and mount 20 are formed using rotational moulding apparatus shown in Figures 2 and 3. The apparatus includes a mould 30 in two parts: an upper part 31 and a lower part 32, which can be separated after use to enable the component to be removed. Around the upper surface 33 of the lower part 32 extends an annular channel 34 the wall of which corresponds to the external shape of the cuff 21. The lower surface of the upper part 31 of the mould has a recess 35 of approximately funnel shape, the wall of which corresponds to the external shape of the mount 20. Additionally, the upper part 31 has a groove 36 in which is clipped the patient end of the inflation line 13. The inflation line 13 projects a short distance beyond the patient end of the groove 36, into the channel 34. A PTFE-coated wire, or a solid PTFE rod (not shown) is inserted in the line 13 during moulding; to prevent occlusion, and is subsequently removed. The moulding apparatus additionally includes a conventional heater 40 and displacement means 41 for altering the orientation of the mould 30 as desired.

[0015] Initially, the mould 30 is oriented as shown in Figure 2, with the upper part 31 uppermost. A measured volume of plastisol 37, or other heat-gellable plastics in fluid form, is added to the mould 30 through an inlet passage, not shown, so that the plastics flows into the channel 34 in the lower part 32. The plastics is preferably in liquid form but could be in other fluid form, such as a powder. The mould 30 is then rocked about the x-axis 42 and the z-axis 43 so that the plastisol comes into contact with the entire surface of the channel 34. The mould 30 is heated by the heater 40 so that the plastisol 37

gels where it contacts the surface of the mould. This rocking movement is relatively brief so that the layer of plastics material built up on the surface of the channel 34 is only thin and, in particular, is of the appropriate thickness to provide the necessary flexibility of the cuff 21. It can be seen that the plastics deposited on the surface of the channel 34 provides a hollow, tubular formation of annular shape.

[0016] After the desired thickness of plastics has been laid down on the surface of the channel 34, the moulding apparatus moves to a second phase in which the mould 30 is rotated about the z-axis 43 by about  $90^\circ$ , as shown in Figure 3. When this happens, the remaining plastisol 37 runs out of the channel 34 and into one side of the funnel-shape recess 35. The quantity of plastisol deposited on the wall of the channel 34 is small compared with the total volume, so the majority of the plastisol is still liquid in the second phase. The mould 30 is gradually rotated and rocked about the x-axis 42 and the z-axis 43 so that the plastisol 37 is deposited on the wall of the recess 35. This process takes longer than that used to form the cuff 21, because the desired wall thickness of the mount portion 20 is substantially greater than that of the cuff. Typically, the wall of the mount 20 would have a thickness of several millimetres, whereas the wall of the cuff 21 would only be a fraction of a millimetre. The quantity of plastisol used is preferably such that when the desired wall thickness of the mount 20 has been deposited, all the plastisol has been gelled. During either of these rotational moulding movements it may be necessary also to rotate or rock the mould 30 about the y-axis. The inflation line 13 extending along the groove 36 becomes embedded within the thickness of the wall of deposited plastics material. It may be necessary to block the patient end of the inflation line 13 with a removable insert, such as a wire, in order to prevent it becoming blocked by the plastics material. Instead of moulding the mask about the inflation line, the mask could be moulded with a small bore, such as by means of a wire core pin within the mould. One end of the bore would extend to the machine end of the mask and the other end would open inside the cuff. The bore could make connection with an inflation line extending within the wall of the tube.

[0017] When all the plastisol has gelled, the mould 30 is heat treated in the usual way fully to cure the plastics. The mould 30 is then separated into its two parts 31 and 32 and the mask 2 is removed. After removal of any sprue or excess plastic, the mask 2 is joined to the tube 1 in the usual way, with the inflation line 13 being clipped into the channel 14. The cuff 21 can then be inflated or deflated as desired via the inflation line 13.

[0018] In practice, the moulding apparatus would have several moulds mounted on a conveyor, turntable or the like, which pass through various stations at which the plastisol is added, the mould is oriented as appropriate, the mould is heat treated, and the finished component is removed.

[0019] Forming the cuff and mount integrally accord-

ing to the present invention, brings several advantages. It saves an additional assembly step of joining the cuff to the mount and thereby considerably reduces overall assembly costs of the complete laryngeal mask. It also improves the integrity of the mask and reduces the risk of separation of the cuff from the mount during use. By avoiding a separate join, the need for inspection and testing of a join is obviated.

[0020] It is not essential for the mount and cuff to be formed integrally since advantages can also be achieved where the mount is pre-formed and the cuff is subsequently moulded with the mount. This still achieves simplification of manufacture and enhanced integrity of the join between cuff and mount. If the mount or cone needs to be clear and transparent, such as in face masks where it is important to be able to see the patient's mouth region, rotational moulding may not be suitable because this technique cannot yet produce the necessary transparency. Rotational moulding is still, however, a desirable technique for forming the cuff of the mask. Whereas in previous face masks, where both the mount/cone and cuff are preformed and subsequently bonded together, the present invention is to mould the cuff directly onto the pre-formed mount/cone so that the moulding operation itself produces the bond between the cuff and the cone.

[0021] With reference to Figure 4, there is shown a face mask 50 comprising an upper mount member or cone 51 and a lower cuff 52. The cone 51 has a main body 53 of domed shape with a short tubular connector 54 at its upper end and a narrow outwardly-projecting flange 55 at its lower end, which is oval in shape. The cone 51 is of a clear, transparent plastics material, typically PVC, and is made by an injection-moulding technique, or by some other technique that achieves the necessary transparency. The cuff 52 is a hollow, inflatable tubular balloon having an inflation inlet 56 extending through the flange 55 of the cone 51. The cuff 52 is shaped to seal around the nose and mouth.

[0022] With reference now also to Figure 5, the pre-formed cone 51 is placed in a rotational mould 60 comprising an upper part 61 of a heat-insulating material, such as PTFE, and a lower part 62 of a metal, such as aluminium. The upper part 61 has a large aperture 63 in which the main part of the cone 51 is located, there being a clearance between the outside of the cone and the inside of the aperture. The lower part 62 of the mould has an annular recess 64 in its upper surface 65 of the same oval shape as the lower edge of the cone 51. In section, the recess 64 defines the shape of the uninflated cuff 52. Two insulating gaskets 66 and 67 of a low durometer silicone are secured to the upper surface of the mould part 62, around the inside and outside respectively of the recess 64.

[0023] Initially, a measured quantity of plastisol 68, or similar material is poured in the recess 64 in the lower part 62 of the mould 60. The cone 51 is then placed on the lower part 62 of the mould with the flange 55 extend-

ing around the opening of the recess 64 and sitting on the inner and outer gaskets 66 and 67. The lower surface of the flange 55 is shown in Figure 6, where it can be seen that it has positioning tabs 69 and ribs 70 that engage in corresponding recesses (not shown) in the upper surface 65 of the lower part 62 of the mould 60. The upper part 61 of the mould 60 is then hinged down so as to trap the flange 55 between the two parts. A pin 71 mounted in the upper part 61 of the mould 60 projects downwardly through a hole in the flange 55 a short distance into the recess 64. The entire mould 60 is then rotated in two directions so as to coat the surface of the recess 64 with the plastisol 68. The lower part 62 of the mould 60 is heated, such as with infra-red lamps, so as to gel the plastisol coated on the surface of the recess 64. The mould 60 is rotated in two directions and stops with the upper part 61 below the lower part 62. In this position, the plastisol 68 flows towards the cone flange 55 where it melts the ribs 70 and the lower surface of the flange, to bond securely with it. After appropriate curing, the two parts 61 and 62 of the mould are separated and the completed face mask 50 is removed. The inflation inlet 56 is subsequently inserted into and sealed with the hole made by the pin 70. This technique enables a hollow cuff to be made by rotational moulding and a cone to be made by a different method whilst avoiding manual assembly operations and ensuring a secure bond.

[0024] It will be appreciated that the cuff of a face mask, laryngeal mask or the like need not necessarily be hollow but could be of a foam.

#### Claims

1. A mask comprising a soft cuff member (21, 52) of substantially annular shape and a more rigid mount member (20, 51) of generally funnel shape, characterised in that the cuff member (21, 52) is moulded with the mount member (20, 51).
2. A mask according to Claim 1, characterised in that the cuff member (21, 52) is formed by rotational moulding.
3. A mask according to Claim 1 or 2, characterised in that the cuff member (21) and mount member (20) are moulded integrally as a single piece.
4. A mask according to Claim 1 or 2, characterised in that the mount member (51) is pre-formed and the cuff member (52) is subsequently moulded with the mount member.
5. A mask according to any one of the preceding claims, characterised in that the cuff member (21, 52) is hollow.

6. A mask according to any one of the preceding claims, characterised in that the mask is a laryngeal mask and the cuff member (21) is adapted to seal with tissue in the region of the hypopharynx.

5

7. A mask according to any one of Claims 1 to 5, characterised in that the mask is a face mask and the cuff member (52) is adapted to seal around the nose and mouth.

10

8. A method of making a mask comprising the steps of adding a fluid plastics material (37) to a mould (30) having a first region (34) defining the shape of a cuff (21) and a second region (35) defining the shape of a mount (20), angularly displacing the mould (30) so that the fluid plastics material (37) coats the first region (34) to form a thin layer of gelled plastics in the first region, angularly orienting the mould (30) so that the fluid plastics material (37) coats the second region (35) to form a thicker layer in the second region, and subsequently removing from the mould (30) a mask (2) with an integral cuff (21) and mount member (20).

15

20

9. A method of making a mask (50) comprising the steps of pre-forming a mount member (53), placing the mount member (53) in a rotational mould (60) and moulding a cuff member (52) with the mount member (53) by rotational moulding.

25

30

35

40

45

50

55

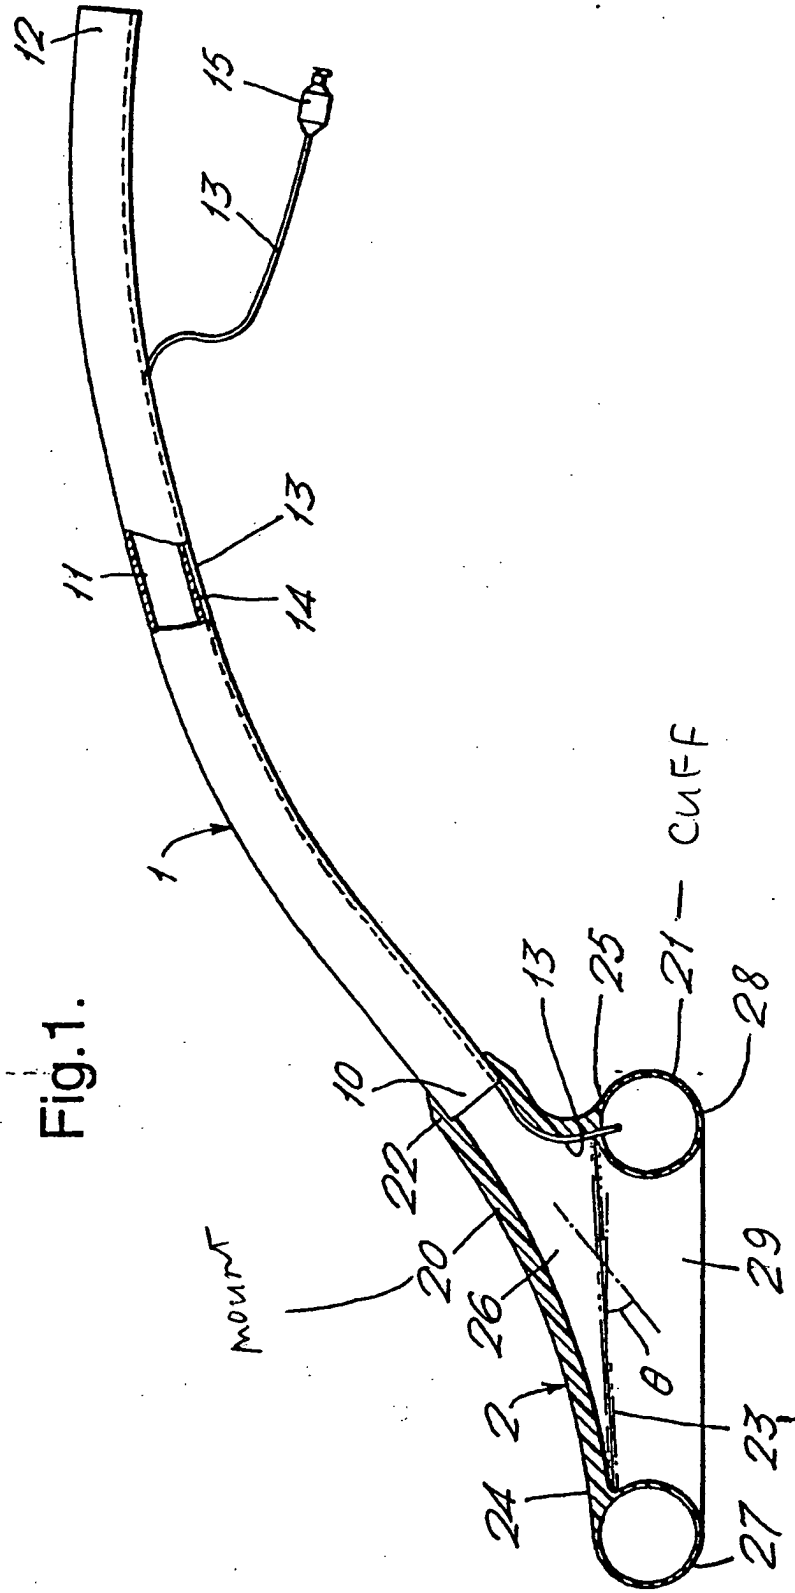


Fig.2.

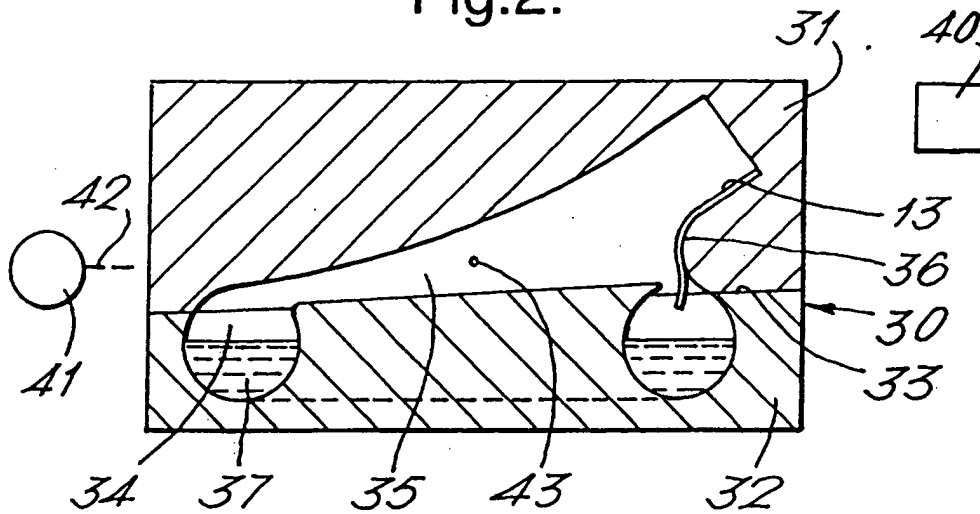
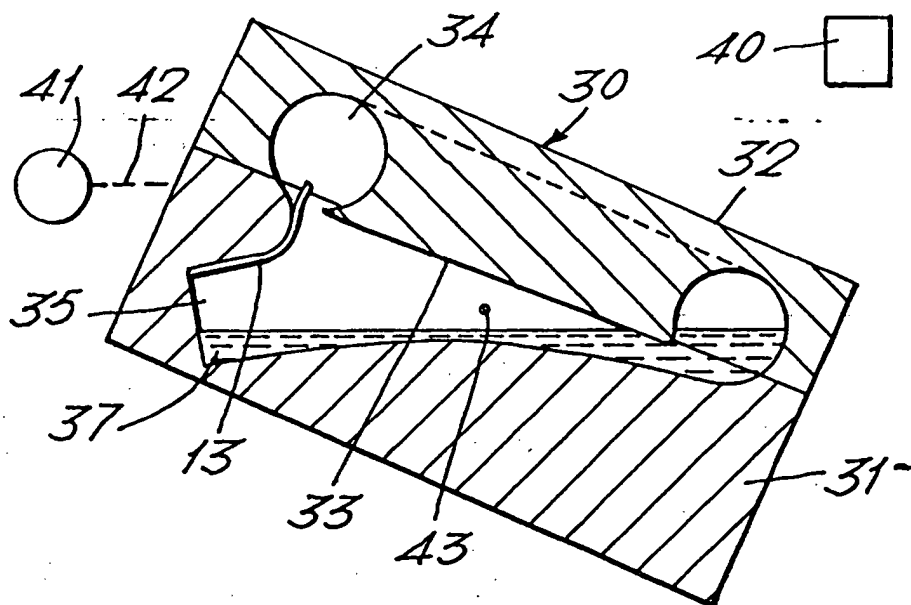


Fig.3.





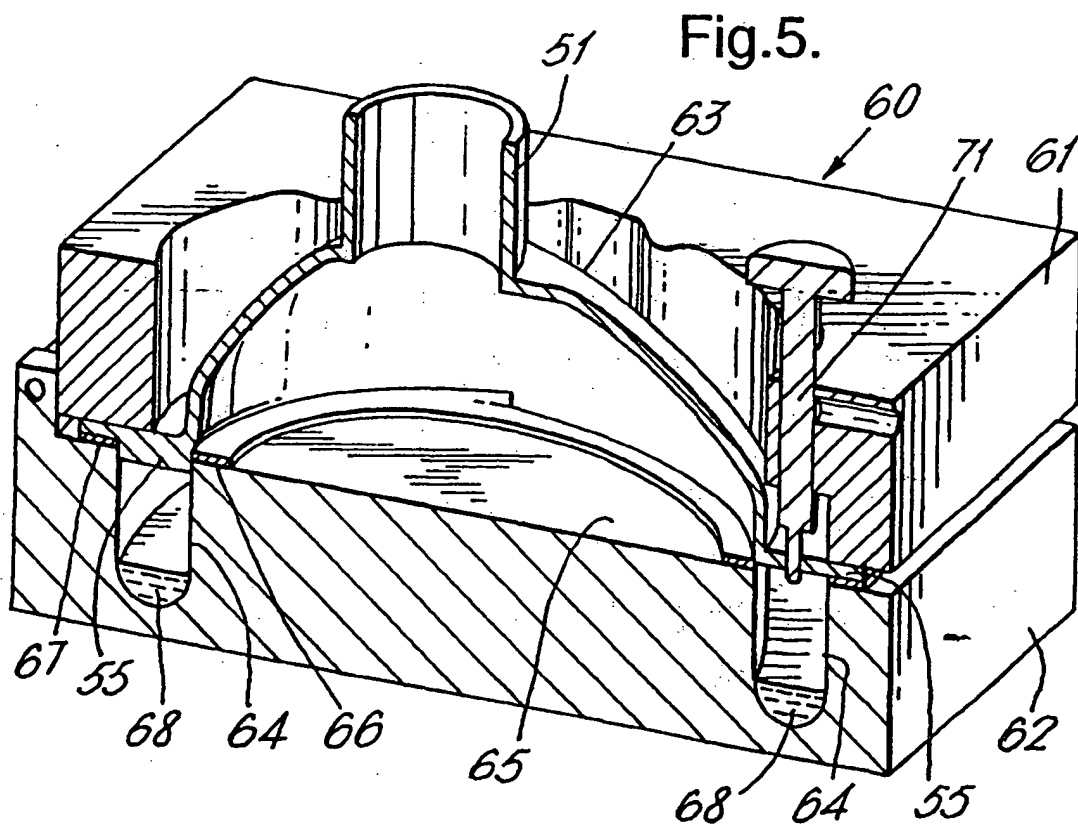




Fig.6.

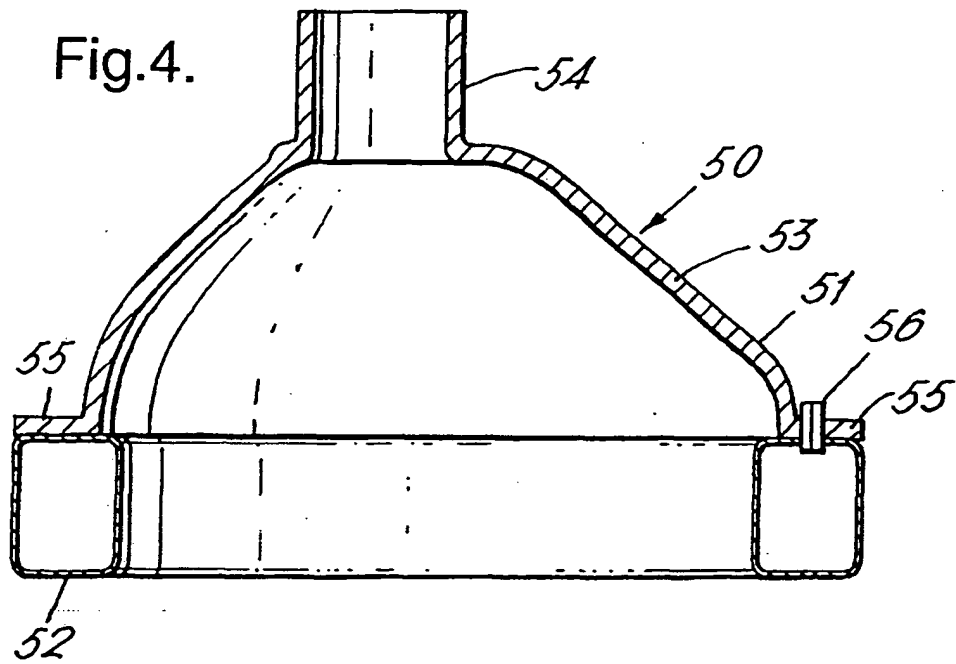

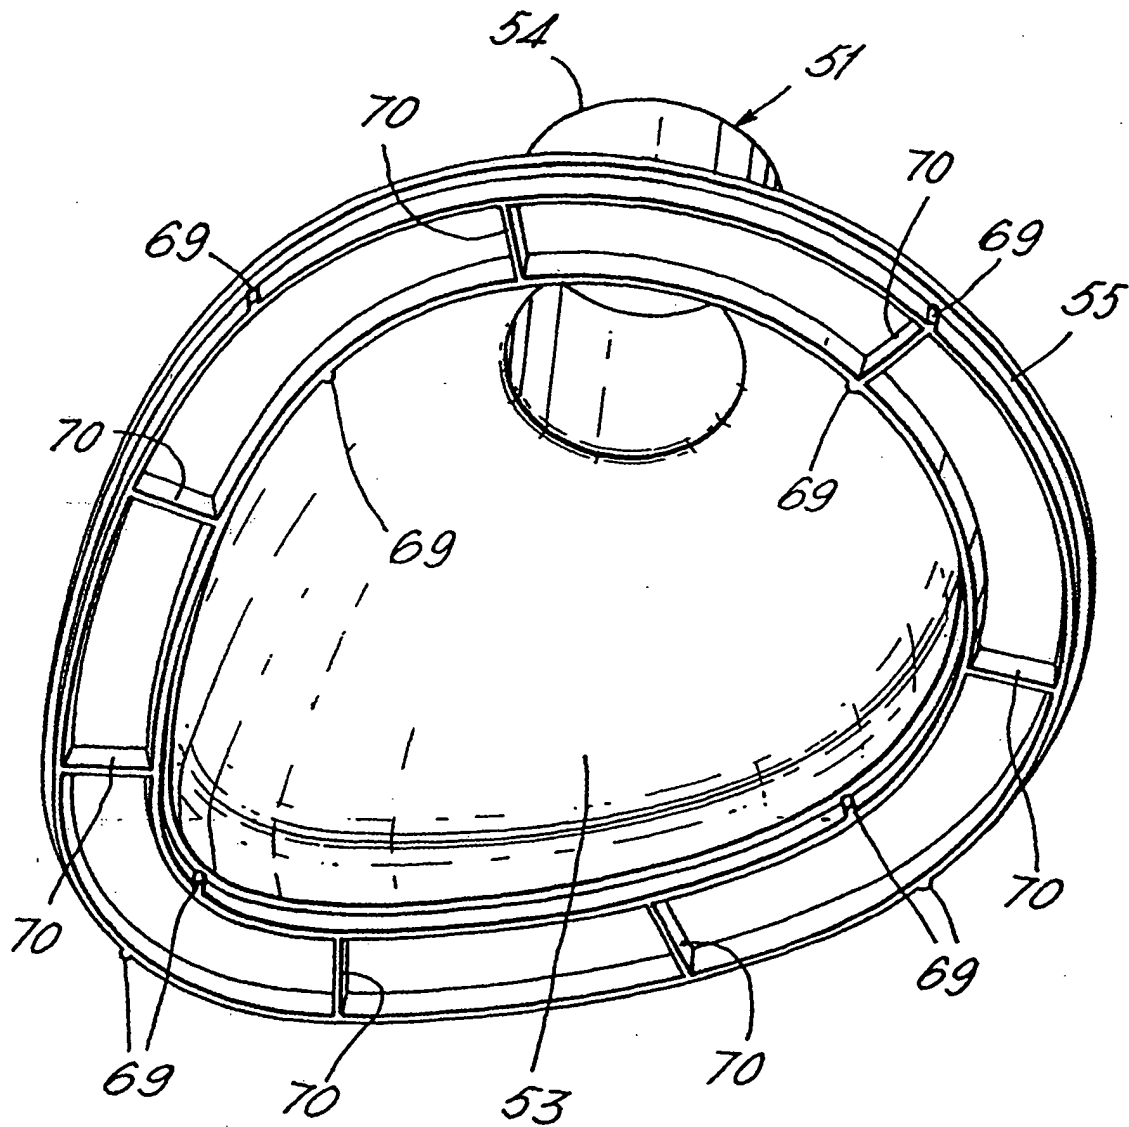

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 0720

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 038 703 A (AIRCO INC) 30 July 1980 (1980-07-30) * abstract; figures 2-4 *	1,4,7	A61M16/04 A61M16/06 B29C41/04
A	---	9	
X	EP 0 911 049 A (SMITHS INDUSTRIES PLC) 28 April 1999 (1999-04-28) * column 2, line 37 - line 56; figures 1-3 *	1,4,6	
X	EP 0 935 971 A (SMITHS INDUSTRIES PLC) 18 August 1999 (1999-08-18) * column 2, line 13 - column 3, line 25; figures 1-3 *	1,3,5,6	
P,X	WO 00 61213 A (BRAIN ARCHIBALD IAN JEREMY) 19 October 2000 (2000-10-19) * page 17, line 26 - page 19, line 25; figures 5,6,8,30-33 *	8	
A	---	2	
X,D	US 5 355 879 A (BRAIN ARCHIBALD I J) 18 October 1994 (1994-10-18) * column 4, line 4 - line 19; figure 4 *	1,3,5,6	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A61M B29C
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>29 June 2001</b>	Examiner <b>Schönleben, J.</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 0720

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-06-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2038703 A	30-07-1980	AU 518083 B	10-09-1981
		AU 5311379 A	19-06-1980
		CA 1133214 A	12-10-1982
		ES 486917 A	16-06-1980
		FR 2443918 A	11-07-1980
		ZA 7906399 A	26-11-1980
EP 0911049 A	28-04-1999	AU 728123 B	04-01-2001
		AU 8832298 A	06-05-1999
		CA 2250377 A	16-04-1999
		GB 2330312 A	21-04-1999
		JP 11192304 A	21-07-1999
		US 6012452 A	11-01-2000
EP 0935971 A	18-08-1999	AU 1212099 A	02-09-1999
		GB 2334215 A	18-08-1999
WO 0061213 A	19-10-2000	AU 3979400 A	14-11-2000
US 5355879 A	18-10-1994	US 5241956 A	07-09-1993
		CA 2107027 A,C	29-03-1994
		AU 3958293 A	29-08-1994
		CA 2155112 A	18-08-1994
		WO 9417848 A	18-08-1994
		MX 9301163 A	29-07-1994
		US 5391248 A	21-02-1995
		AT 151650 T	15-05-1997
		AU 666756 B	22-02-1996
		AU 4580393 A	14-02-1994
		BR 9306757 A	08-12-1998
		CA 2100998 A,C	24-01-1994
		DE 69309930 D	22-05-1997
		DE 69309930 T	23-10-1997
		DK 651664 T	20-10-1997
		EP 0651664 A	10-05-1995
		ES 2103481 T	16-09-1997
		WO 9402191 A	03-02-1994
		GR 3023983 T	31-10-1997
		JP 2918338 B	12-07-1999
		JP 7509154 T	12-10-1995
		NZ 254213 A	27-02-1996

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**